



BAURAL

Self-propelled seed drills POS6

**HIGH-TECH MACHINES FOR AGRONOMIC
RESEARCH AND SEED PRODUCTION**



Seed drills



Precision seedings

Self propelled seed drills designed to meet your needs

- Two versions depending on your needs
- Simple and robust design
- Daily reduced maintenance
- For seeding of maize, sunflower seeds, rapeseeds, cereals, beetroots and others
- Efficient transmission with 20 gears for a distance between seeds from 1 to 80 cm
- Versatile seeding elements with adjustable ground pressure
- Choice of equipment to close soil
- Transport as normalized size
- Authorize to drive on french roads



Powerful engine

- DOOSAN Stage V (55ch, 41kw)
- In accordance with applicable standards
- Total access for maintenance
- Electronic control board and engine commands inside the cabin
- Softened bonnet for cooling engine and hydraulic down





Driving position and transmission

Driving position : two versions

Driver centered at the back of the POS
 Operators on either side of the driver
 Possibility to work alone on « Stop at plot »

Or

Driver centered in the front of the POS
 Operators at the back of the frame
 Total visibility

Seeder controller (optional)
 Foldable top protection bar (optional)
 Foldable cabin with laterals hessians (optional)



Transmission

- Standard rear drive wheels: 7.50 R 20
 Or large rear drive wheels: 300 / 70 R 20

- Standard steering front wheels: 7.00 x 12
 Or large steering front wheels: 11.0 / 65 x 12

2 speed gears: road / field
 Maximum road speed: 25 km/h

Hydrostatic pump with POCLAIN engine wheel

Minimized turning radius: outside diameter of 8.30 m

Speed indicator (optional)



Mono-seed seed drill

Two versions

« Stop at plot » version

Seeding elements draining system: valve and moto-reductor

Control from driver's seat

The driver must stop after each micro-plot to drain leftovers seeds in the element to then fill it again.



« Non-stop » continuous version

Cycle operating system:
Manual contactor
Index on chain
Cable winder
Telemetric wheel

The driver progress without stopping from plot to plot. A cycle command (manual, cable or GPS) ensure the suction of the leftovers seeds in the element and then allow the filling.



Mono-seed seed drill

Simplicity and reliability

Seeding element driving

Disengaged transmission by chain and cardan joints
« Khun » gearbox with 20 gears



Seeds reaspiration

Powerful and waterproof réaspiration valve with control sensor
Distribution box with included reaspiration chamber
Translucents row by row collectors



Seeds filling

Seeds separators (from 1 to 9 rows) with manual or automatic opening
Feeding trapdoor for all seeds with control sensor
Automatic magazine table





Continuous seed-drill Belted cone distribution

Distribution head with manual or automatic leveling



**Telescopic girder
Seeding with double KUHN discs**



Seeding with plowshares on a rocker arms



**Seeding with double LEMKEN discs
Pneumatic transport of seeds**





Variety of additional equipment

Diffuser on turbine end



Double turbine for pneumatic transport



Air compressor



Pneumatic KUHN micro-granulateur



Mechanical Sepeba micro-granulator



Chain operated start cycle



Front harrow



Croskilette roller and Delimbe anti-slug



Fertilisor and telescopic girder from 45 to 80 cm





Features

Engine and transmission :

DOOSAN Stage V (55ch, 41kw)
Liquid cool down engine
Tank of 30 liters

Hydrostatic transmission :

1 pump with variable volumetric size
2 POCLAIN wheel engine with 2 volumetric size (2 speeds with electric command)
Speed from 0 to 25 km/h
Hydraulic tank with cooler
Indicateur de vitesse d'avancement (optional)
Speed regulator (optional)

Electricity :



Circuit (alternator, starter, ...) : 12 Volts
Rotating lights and front lights
Traffic lights (optional)

Tyres :

AR : 7.50 x 20
AR : 300 / 70 R 20 (optional)
AV : 7.00 x 12
AV : 11.0 / 65 x 20 (optional)

Seeding equipment :

Minimal distance between rows : 25 cm (18 cm with PN EE element)
Adjustable seed spacing from 1 to 80 cm
Number of seeding elements to define
Average weight of a seeding unit : from 40 to 100 kg (depending on chosen equipment)
Hydraulic functioning of the turbine (with electric command)
Gearbox : 20 gears
Seeding controller (optional)

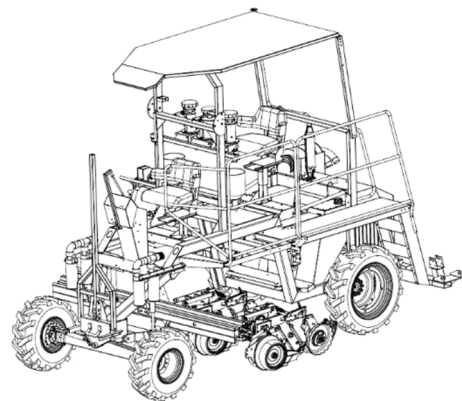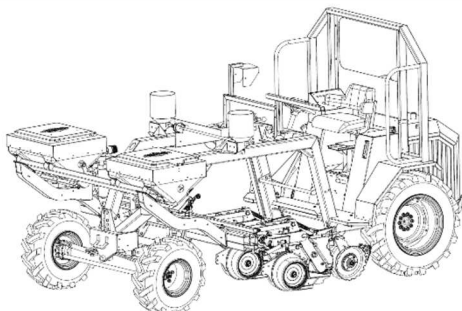

Additional equipment :

Front lifting
Back lifting
Double turbine
Diffuser on turbine end
Micro-insecticides
Fertiliser
Cable winder with stops
Chain with index
Disc liner
Anti-slug
Telescopic girder
Foldable guiding bar
Cabin with laterals hessians
Compressor

Dimensions and weight :

Total length without equipment : 4,20 m
Total width with equipment : 2,50 m
Maxi total height POS 6 (with cabin) : 3,00 m
Mini height POS 4 (without protection bar) : 1,55m
Height from ground : 0,35 m
Wheelbase : 2,75 m
Standard weight (without complementary front or rear equipment / 4 elements, for a total of 2 200 kg
* Front axle : 750 kg
* Rear axle : 1 450 kg
Distance between wheels : 1,50 m - 1,60 m
Turning radius : 8,30 m

Others :

Operating manual
Spare parts catalog



Contact us

BAURAL

26 Rue du haut buisson

41330

Champigny-En-Beauce

France

+33 (0)2 54 33 11 01

Baural.contact@baural.fr

www.baural.fr

